

PURE XL 77 (PUXL77V2)



A

PURE Manual - Ecological combustion - Sealed device

PUXL77v2-Ac-AV-VR / PUXL77v2-Ac-AV-DM / PUXL77v2-Ac-AV-BN

Steel door

PUXL77v2-Ac-SV-VR / PUXL77v2-Ac-SV-BN / PUXL77v2-Ac-SV-DM

PUXL77v2-NL-AV-VR / PUXL77v2-NL-AV-DM / PUXL77v2-NL-AV-BN

New look door

PUXL77v2-NL-SV-VR / PUXL77v2-NL-SV-DM / PUXL77v2-NL-SV-BN

kW	Rendement %	CO (mg/Nm³)	COG (mg/Nm³)	Poussière (mg/Nm³)	NOX (mg/Nm³)	eI_max (kw)	eI_min (kw)	eI_sb (kw)
12	77	900	59	22	57	0,052	0,037	0,001

Options

Dimensions ext. (mm) : 770 x 600 x 450

Flat frame PURE XL 77 - 3 sided - 40mm

Flat frame PURE XL 77 - 4 sided - 40mm

Frame PURE XL 77 - drawn steel - 4 sided - 10 mm - depth 20mm

Frame PURE XL 77 - drawn steel - 4 sided - 10 mm - depth 55mm

Reserve door fitting

Hot air tubes kit 125 Ø + Air stop kit





Smoke outlet : 45° or right

Caractéristiques

Manual combustion air regulation - external air intake Ø 100 mm - Double baffles, one vermiculite baffle adjustable to 3 positions and one fixe - stop embers - 2 warm air tubes Ø 125 mm - smoke outlet Ø 180 mm -

Interior vermiculite (VE) or black concrete (BN) or metal decoration (DM) - color anthracite - WITHOUT FINISHING FRAME (following your choice) - Concrete floor - 4 adjustable feet - 2-position door closing system - Double baffles, one vermiculite baffle adjustable to 3 positions and one fixe

Real view of fire (mm) - 616 x 404

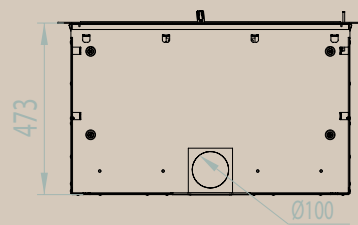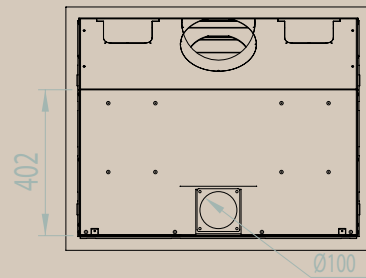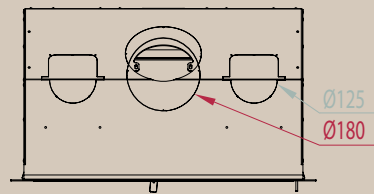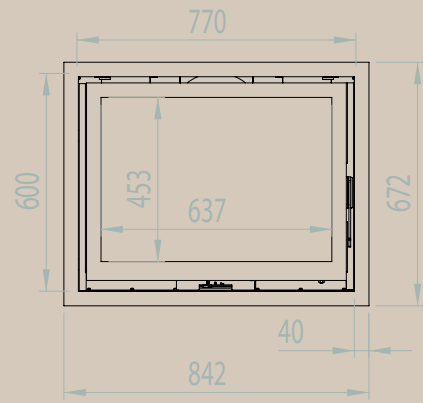

NOTES: