


# PURE L 67 (PUL67V2)

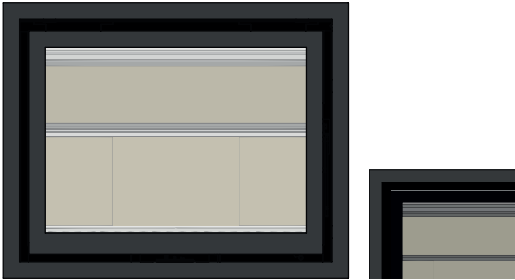

A

PURE Manual - Ecological combustion - Sealed device

PUL67v2-Ac-AV-VE / PUL67v2-Ac-AV-DM / PUL67v2-Ac-AV-BN Steel door

PUL67v2-Ac-SV-VR / PUL67v2-Ac-SV-BN / PUL67v2-Ac-SV-DM

PUL67v2-NL-AV-VE / PUL67v2-NL-AV-DM / PUL67v2-NL-AV-BN New look door

PUL67v2-NL-SV-VE / PUL67v2-NL-SV-DM / PUL67v2-NL-SV-BN

kW	Rendement %	CO (mg/Nm <sup>3</sup> )	COG (mg/Nm <sup>3</sup> )	Poussière (mg/Nm <sup>3</sup> )	NOX (mg/Nm <sup>3</sup> )	eI_max (kw)	eI_min (kw)	eI_sb (kw)
12	77	900	59	22	57	0,052	0,037	0,001

Options

Dimensions ext. (mm) : 670 x 550 x 430

Flat frame PURE L 67 - 3 sided - 40mm

Flat frame PURE L 67 - 4 sided - 40mm

Frame PURE L 67 - drawn steel - 4 sided - 10 mm - depth 20mm

Frame PURE L 67 - drawn steel - 4 sided - 10 mm - depth 55mm

Hot air tubes kit 125 Ø + Air stop kit

Reserve door fitting

Interior : vermiculite (VE) or black concrete (BN) or metal decoration (DM)

Smoke outlet : 45° or right

Shut-off nozzles for hot air distribution

Caractéristiques

Manual combustion air regulation - external air intake Ø 100 mm - baffle vermiculite + 2e chicane inox - stop embers - 2 warm air tubes Ø 125 mm - smoke outlet Ø 150 mm - color anthracite - WITHOUT FINISHING FRAME (following your choice) - Concrete floor - 4 adjustable feet - 2-position door closing system - Double baffles, one vermiculite baffle adjustable to 3 positions and one fixe  
Real view of fire (mm) - 516 x 354

