

MODUL-ART 16/9 XL (MD16-9-V2)



A

Modul-Art - Ecologische verbranding - Hermetisch

MDXL16-9v2-Ac-VR / MDXL16-9v2-Ac-BN / MDXL16-9v2-Ac-DM

Stalen deur

MDXL16-9v2-NL-VR / MDXL16-9v2-NL-BN / MDXL16-9v2-NL-DM

New look deur

kW	Rendement %	CO (mg/Nm ³)	COG (mg/Nm ³)	Poussière (mg/Nm ³)	NOX (mg/Nm ³)	eI_max (kW)	eI_min (kW)	eI_sb (kW)
13	78	1213	71	15	115	0,000	0,000	0,000

Opties

Afwerking Kit (afwerkingsplaat verse lucht)

Kit Ophang kader (afstand muur: 6,3cm)

Ombouw deur scharnieren rechts





Inbegrepen

Manuele regeling van luchtinlaat - externe luchttoevoer Ø 100 mm - vlamkeerplaat(en) - blokkenhouder - natuurlijke convectie - binnenafwerking vermiculiet - kleur anthraciet - boven of achter aansluiting (mannelijk) naar keuze

Ext. afmetingen (mm) : 1010 x 525 x 485

Reëel zicht op vuur (mm) - 852 x 324



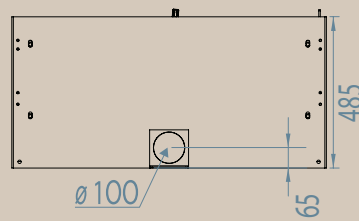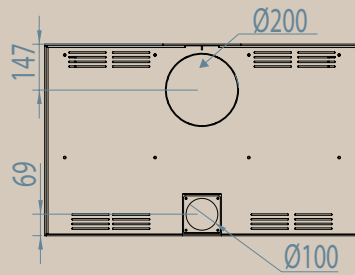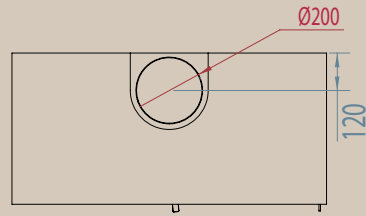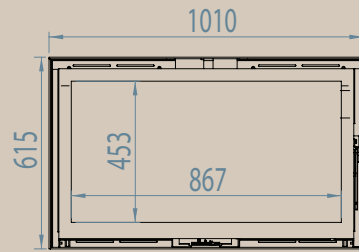

NOTES: